


D30S

Where the pros go for speed and performance!

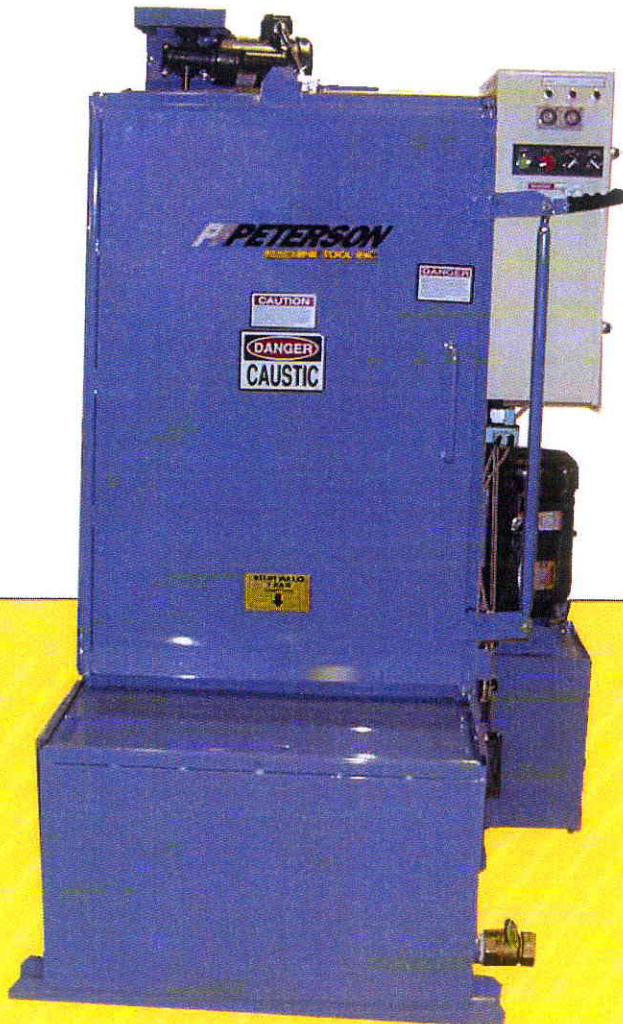

D30S Spraycabinet

The D30S will cut your cleaning time to 10 minutes or less for most applications.

Features:

- Precision fan nozzles produce high pressure/volume spray that shears off grease and grime.
- Cleaning fluid is thermostat and 7-day timer controlled for optimum cleaning efficiency.
- Cabinet is insulated for energy efficiency and quiet operation.
- Rinse water diverter design prevents loss of chemical change and controls rinse water.
- Door safety switch stops pump if door is opened.
- Turntable cart rolls out to aid loading
- Large 3.5 cubic foot capacity filter also holds small parts for soaking during cleaning cycle.
- Positive gearbox/motor turntable drive system

PETERSON
MACHINE TOOL INC.



Where the pros go for speed and performance!

Specifications

D30S

Height Above Turntable	38"
Turntable Diameter	26"
Overall Height	79"
Floor Space Required (Electric)	52" x 42" W
Floor Space Required (Gas)	52" x 52" W
Load Capacity	600 lbs.
Spray Nozzles	
Wash	15 (2) adjustable
Rinse	8
Pump Motor, Standard	5 HP, 240V, 3Ø
Pump Motor, Optional	5 HP, 230V, 1Ø
	7.5 HP, 230V 1Ø or 3)
Pump Output @ PSI	75 GPM @ 60 PSI
Heater Watt. (Electric)	9 KW
Burner BTU (Gas)	100,000 BTU
Cabinet Steam Vent	6" Dia.
Solution Capacity	85 Gal.
Filter Area	505 Sq in.
Cabinet Construction	12 Ga.
Electrics	240V, 3Ø
Gas Heated	15A
Electric Heated	38A
Shipping Weight (Electric)	1,285 lbs.
Shipping Weight (Gas)	2,285 lbs.

Standard Equipment


- 7-day heat timer
- UL Listed Industrial Control Panel
- Forced Draft Burner or Electrics Solution Heating
- Standard Head Rack
- Automatic Sequential Wash/Rinse Cycle
- 1" Fiberglass Insulation

PETERSON
MACHINE TOOL INC.

www.petersonmachine.com
pmt@petersonmachine.com

The D30S is a favorite of engine rebuilders, transmission shops and parts recyclers. It drastically reduces cleaning time to generate more profit and a better overall job.

Shown with optional ATAK Nozzle Extenders for Transmission Cleaning

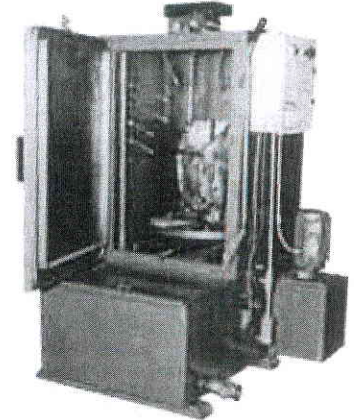

Optional Equipment

- Single Phase Power of 480V, 3Ø Power
- ATAK Nozzle Extenders for Transmission Shops
- 671 Head Rack
- 21" Dia. x 18" Parts Basket
- 12" Dia. x 6" Transparts Basket
- Oil Skimmer
- RWS50 Rinse Water Storage
- 7.5 HP PUmp (100 GPM @ 70 PSI)
- Reservoir Soak Basket

PETERSON MACHINE TOOL, INC. RESERVES THE RIGHT TO CHANGE ITS PRODUCTS OR SPECIFICATIONS AT ANY TIME WITHOUT NOTICE OR OBLIGATION.

All machines are equipped with guards or safety devices to comply with State and Trade Regulations for the protection of operators. All electrical wiring is designed to conform with National and State specifications. Peterson Machine Tool, Inc. or any of its divisions will not assume responsibility in cases of failure by the operator to exercise reasonable care when using the equipment.

PETERSON MACHINE TOOL, INC.

5425 Antioch Drive
Merriam, KS 66202
Phone: 913.432.7500
Fax: 913.432.8970

Toll Free: **800.255.6308**

Email: pmt@petersonmachine.com

1100 N. Union Street
Council Grove, KS 66846
Phone: 620.767.6721
Fax: 620.767.6415
Toll Free: **800.835.3528**